

NSPLED123 Series

Versatile & low glare LED recessed spotlight



NSPLED1233A



NSPLED1233B



NSPLED1233C



NSPLED1233D



APPLICATIONS

- Hotel bedrooms
- Bars & restaurants
- High quality residential developments
- Retail
- Residential area

CONSTRUCTION


- Polycarbonate body and bezel
- Vacuum metalized reflector
- Adjustable angle 15°
- Integrated driver

OPTIONS

- **Bezel:** Choice of 4 bezels, as illustrated
Use suffix A, B, C, D for 4 different shapes when ordering


TECHNICAL DETAILS

- COB LED
- Designed to deliver UGR <19 in most installations
- Rated life: 30,000 hours

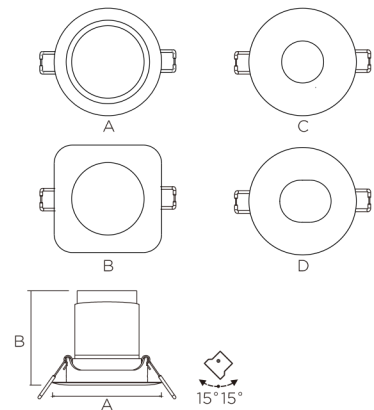


Watts	A	B	Cut-out
3W/5W(A/B)	95	66	Ø75
7W/9W(A/B)	118	82	Ø95
3W/5W(C/D)	Ø95	76	Ø75
7W/9W(C/D)	Ø115	95	Ø95

Model	Colour temp.	Lumens	CRI	PF
NSPLED1233A/B/C/D 3W	3000K/4000K/5700K	200 lm	>90	>0.5
NSPLED1235A/B/C/D 5W	3000K/4000K/5700K	320 lm	>90	>0.5
NSPLED1237A/B/C/D 7W	3000K/4000K/5700K	550 lm	>90	>0.9
NSPLED1239A/B/C/D 9W	3000K/4000K/5700K	700 lm	>90	>0.9



NSPLED1239A 9W 24°



NSPLED1239C 9W 24°